

# Aluminum F357

To Learn More Visit  
[velo3d.com](http://velo3d.com)  
[info@velo3d.com](mailto:info@velo3d.com)

Headquarters  
 511 Division Street  
 Campbell, CA 95008

European Technology Center  
 Am Technologiezentrum 5  
 86159 Augsburg, Germany

## Material & Process Capability


Aluminum F357 is a lightweight, corrosion resistant, and highly dynamic load-bearing material ideal for applications that require a combination of mechanical and thermal load endurance with low weight. It is typically used for heat transfer and other components in the defense and automotive industries.

The Velo3D intelligent additive printing solution uniquely enables companies to build the parts they need without compromising design or quality - resulting in complex parts higher in performance than traditional casting techniques or other additive methods.

## General Process

Aluminum F357 is a foundry-grade beryllium-free aluminum-silicon alloy, similar to A357. It has excellent weldability and corrosion resistance and is heat-treatable to T5, T6, and T7.

This data sheet specifies the expected mechanical properties and characteristics of this alloy when manufactured on a Velo3D Sapphire® System. Parts built from Aluminum F357 on a Sapphire System can be heat treated using processes similar to those used on parts manufactured by other methods. All data is based on parts built with Velo3D standard 50 µm layer thickness parameters. Velo3D uses Tekna Aluminium F357.

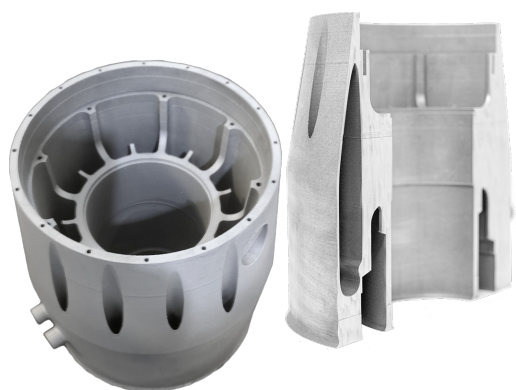

Typical Volume Rate <sup>1</sup> , cc/hr	80
Density, g/cc (lbs/cubic inch)	2.67 (0.097)
Relative Density, percent	99+
Surface Finish <sup>2</sup> , S <sub>a</sub> , µm (µin)	<20 (787) for angles >25° from horizontal

## Mechanical Properties at Room Temperature

Property <sup>3</sup>	As Printed		After Heat Treatment <sup>4</sup>		After HIP <sup>5</sup>	
	Mean -3σ	Mean	Mean -3σ	Mean	Mean -3σ	Mean
Modulus of Elasticity, GPa (msi)	53.4 (7.75)	73.0 (10.6)	48.2 (7.00)	71.8 (10.4)	49.2 (7.14)	75.8 (11.0)
Ultimate Tensile Strength, MPa (ksi)	332 (48.1)	350 (50.7)	279 (40.5)	307 (44.5)	302 (43.8)	329 (47.7)
Yield (0.2% Offset), MPa (ksi)	230 (33.4)	238 (34.5)	225 (32.6)	252 (36.6)	226 (32.8)	262 (37.9)
Elongation At Break, percent	2.61	7.09	5.45	10	9.12	12.76

**1.** Geometry-dependent. **2.** Depends on orientation and process selected. **3.** Mechanical & test samples printed in vertical orientation. **4.** Heat treatment solution at 540°C (1000°F) for 30 minutes, water quench and age at 160°C (320°F) for 6 hours **5.** Hot Isostatic Pressing at 510°C (950°F) at 15 ksi for 4 hours, rapid cool, solution at 540°C (1000°F) for 30 minutes, water quench and age at 160°C (320°F) for 6 hours.